

FULL PACKAGING S.R.L.

TYPE: RETTANGULAR BUCKET
 MODEL: 11-1000-P2
 LIDS: P-05pR/Bis/2;
 P-05PR/Bis/3

www.full-packaging.it

DIMENSIONS AND WEIGHT

DESCRIPTION	DATA
UPPER LENGHT (WITH FLANGE)	286,0 mm
UPPER WIDTH (WITH FLANGE)	198,6 mm
BOTTOM LENGTG	249,3 mm
BOTTOM WIDTH	161,1 mm
HEIDGT (WITH STANDARD LID)	266,0 mm
HEIDGT (WITH LID FOR FOILING))	-
NOMIANL CAPACITY	10.000 ml
TOTAL CAPACITY	11.700ml
TOTAL USABLE CAPACITY	10.600 ml
CONTAINER WEIGHT	300 g
HANDLE WEIGH (PP) OPTIONAL	16 g
HANDLE WEIGH (METAL) STANDARD	24 g
WEIGHT TOLLERANCE	+/-5%
DIMENSION TOLLERANCE	*/- 1mm


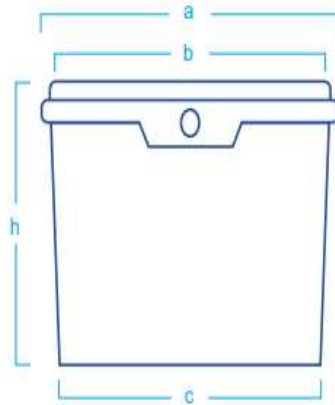


PHOTO OF PRODUCT



DECORATION

DESCRIPTION	IML	PARZIAL IM
WIDTH (B) :	---	-
HEIGHT (H):	----	-

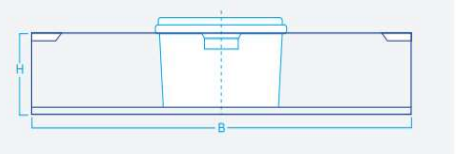

LIDS

DESCRIPTION	DATA
NAME	P-05PTR/Bis/2
OPTIONAL	-
WEIGHT	59 g
IML	YES
OFFSET	NO



DESCRIPTION	DATA
NAME	P-05PR/Bis/3
OPTIONAL	-
WEIGHT	57 g
IML	NO
OFFSET	NO



RAW MATERIAL/ TRANSPORT AND WAREHOUSING

• Bucket and lids are made of polypropylene (PP)

• **Warehousing:** In the case of stacking pallets with filled containers put weight uniformly, using for example proper separators

• **Filling: and closing conditions:** max content temperature during filling 95° C, during stacking content temperature should be lower than 45°C. Put not more than 2 warm containers in the stack.

When temperature decrease to 25-30° containers are characterized by optimal rigidity and mechanical parameters allowing stacking for maximal static load as below.

• load on the lower container:

Static (T<23c°). <45kg

Trasparent container < 36kg

• **Trasportation of filled containers:** containers may be stacked to the 66 % of maximal static load.

• **Palletizing of containers:** product with density 1,6g/cm3 according to the customer practice giving consideration to the mentioned earlier values.

• **All materials and dyes used:** to the produce container or lid designed for the food sector are pproved for food contact


• **This guarantee** is valod 12 months from date of delivery. During this time, the, the package shouldbe used. All packages from singles pallet should be used immediately after un paking.

• **Manufacturer** is not responsible for conatiner deformation because stacking of singles pallets or nputting on them an extra load.

PALLETIZATION FILLED CONTAINERS



TOP
VIEW



SIDE
VIEW
tale

PALLETIZATION AT DELIVERY

480 unit/pallets
 packaging: hood or bag

BASE COLOURS

