

FULL PACKAGING S.R.L.

TYPE: AROUND BUCKET
 MODEL: 11-0275 LB
 LID: P-2,75LB/1

www.full-packaging.it

DIMENSIONS AND WEIGHT

DESCRIPTION	DATA
UPPER DIAMETER (INSIDE)	162,8 mm (b)
UPPER DIAMETER (WITH FLANGE)	174,0 mm (a)
UPPER DIAMETER (WITH HANDLE)	173,2 mm
BOTTOM DIAMETER (EXTERNAL)	144,5 mm (c)
HEIGHT (WITH STANDARD LID)	156,4 mm (h)
HEIGHT (WITH LID FOR FOILING)	_____
NOMINAL CAPACITY	2.500 ml
TOTAL CAPACITY	2.800 ml
TOTAL USABLE CAPACITY	2.600 ml
CONTAINER WEIGHT	76,3 g
HANDLE WEIGHT (STRAPP)	2,9 g
HANDLE WEIGHT (METAL)	12, g
WEIGHT TOLLERANCE	+/- 5%
DIMENSION TOLLERANCE	+/- 1mm


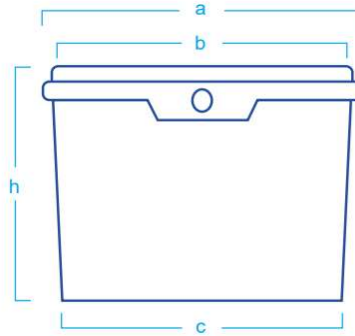


PHOTO OF PRODUCT



DECORATION

DESCRIPTION	OFFSET	IML
WIDTH (B) :	490,0 mm	511,46 mm
HEIGHT (H):	120,0 mm	139,33 mm

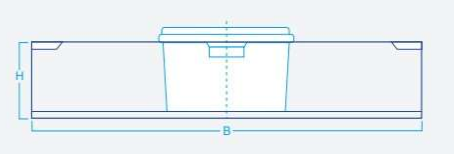

LID

DESCRIPTION	DATA
NAME	P-2,75LB/1
OPTIONAL	NO
WEIGHT	17,5g
IML	NO
OFFSET	NO



RAW MATERIAL/TRANSPORT AND WAREHOUSING

• Bucket and lids are made of polypropylene (PP)

• **Warehousing:** In the case of stacking pallets with filled containers put weight uniformly, using for example proper separators

• **Filling: and closing conditions:** max content temperature during filling 95° C, during stacking content temperature should be lower than 45°C. Put not more than 2 warm containers in the stack.

When temperature decrease to 25-30° containers are characterized by optimal rigidity and mechanical parameters allowing stacking for maximal static load as below.

• load on the lower container:

Static (T<23c°). <25

Trasparent container < 20kg

• **Transportation of filled containers:** containers may be stacked to the 66 % of maximal static load.


• **Palletizing of containers:** product with density 1,6g/cm3 according to the customer practice giving consideration to the mentioned earlier values.

• **All materials and dyes used:** to the produce container or lid designed for the food sector are approved for food contact


• **This guarantee** is valid 12 months from date of delivery. During this time, the package should be used. All packages from single pallet should be used immediately after unpacking.

• **Manufacturer** is not responsible for container deformation because stacking of single pallets or putting on them an extra load.

PALLETIZATION FILLED CONTAINERS



TOP VIEW



SIDE VIEW
tale

PALLETIZATION AT DELIVERY

2200 unit/pallets
 packaging: hood or bag

BASE COLOURS

