

FULL PACKAGING S.R.L.


www.full-packaging.it

TYPE: AROUND BUCKET
 MODEL: 11-0800 BIS
 LID:S P-10Bis/4H
 P-10Bis/4FH

DIMENSIONS AND WEIGHT


DESCRIPTION	DATA
UPPER DIAMETER (INSIDE)	253,2 mm (b)
UPPER DIAMETER (WITH FLANGE)	270 mm (a)
UPPER DIAMETER (WITH HANDLE)	270,0 mm
BOTTOM DIAMETER (EXTERNAL)	228,1 mm (c)
HEIGHT (WITH STANDARD LID)	219,0 mm (h)
HEIGHT (WITH LID FOR FOILING)	227,0 mm
NOMINAL CAPACITY	8.000 ml
TOTAL CAPACITY	9.600 ml
TOTAL USABLE CAPACITY	9.100 ml
CONTAINER WEIGHT	240 g
HANDLE WEIGHT (STRAP)	10 g
HANDLE WEIGHT (SHORT STRAP)	9,5 G
HANDLE WEIGHT (METALL)	42 g
WEIGHT TOLLERANCE	+/- 5%
DIMENSION TOLLERANCE	+/- 1mm

PHOTO OF PRODUCT

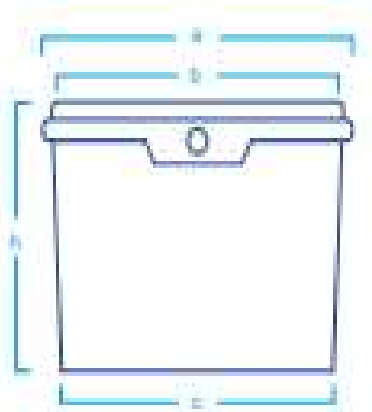

DECORATION

DESCRIPTION	OFFSET	IML
WIDTH (B) :	400 mm	796 mm
HEIGHT (H):	190mm	190 mm

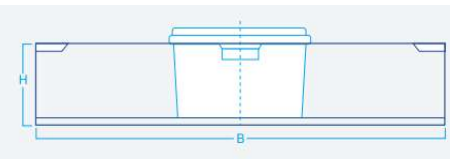

LIDS

DESCRIPTION	DATA
NAME	P-10Bis/4H
OPTIONAL	NO
WEIGHT	60 g
IML	YES
OFFSET	NO



DESCRIPTION	DATA
NAME	P-10Bis/4FH
OPTIONAL	YES
WEIGHT	61,5 g
IML	YES
OFFSET	NO



RAW MATERIAL/TRANSPORT AND WAREHOUSING

• Bucket and lids are made of polypropylene (PP)

• Warehousing: In the case of stacking pallets with filled containers put weight

uniformly, using for example proper separators

• **Filling: and closing conditions:** max content temperature during filling 95° C, during stacking content temperature should be lower than 45°C. Put not more than 2 warm containers in the stack.

When temperature decrease to 25-30° containers are characterized by optimal rigidity and mechanical parameters allowing stacking for maximal static load as below.

• load on the lower container:

Static (T<23c°). <44kg

Transparent container < 35kg

• **Transportation of filled containers:** containers may be stacked to the 66 % of maximal static load.


• **Palletizing of containers:** product with density 1,6g/cm3 according to the customer practice giving consideration to the mentioned earlier values.

• **All materials and dyes used:** to the produce container or lid designed for the food sector are proved for food contact


• **This guarantee** is valid 12 months from date of delivery. During this time, the package should be used. All packages from single pallet should be used immediately after unpacking.

• **Manufacturer** is not responsible for container deformation because stacking of single pallets or putting on them an extra load.

PALLETIZATION FILLED CONTAINERS



TOP VIEW



SIDE VIEW
tale

PALLETIZATION AT DELIVERY

600 unit/pallets
packaging: hood or bag

660 unit/pallets
packaging: hood or bag

BASE COLOURS



Pantone
2350 C



Pantone
349 C



Pantone
2748 C



Pantone
113 C