


FULL PACKAGING S.R.L.

BICKET TYPE: OVAL
 MODEL : 11-1200 OV2
 LID: P-120V/Bis/2

www.full-packaging.it

DIMNESIONS AND WEIGHT

DESCRIPTION	DATA
UPPER LENGTH (WITH BORDER)	340,0 mm
UPPER WIDTH (WITH BORDER)	262,0 mm
LOWER LENGTH (BOTTOM)	302,0 mm
LOWER WIDTH (BOTTOM)	224,0 mm
HEIGHT WITH LID	238,0 mm
HEIGHT WITH LID (OPTIONAL)	-
NOMINAL CAPACITY	12.000 ml
TOTAL CAPACITY	13.400 ml
TOTAL USABLE CAPACITY	12.400 ml
WEIGHT CONTAINER	358 g
HANDLE WEIGHT	45 g
WEIGHT TOLLERANCE	+/- 5%
DIMENSION TOLLERANCE	+/- 1mm




PRODUCT PHOTO



DECORATION

DESCRIPTION	OFFSET	IML
WIDTH (B) :	-	908,6 mm
HEIGHT (H):	-	247,2 mm

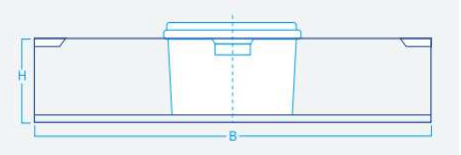

LID

DESCRIPTION	DATA
NAME	P-120V/Bis/2
OPTIONAL	-
WEIGHT	104 g
IML	NO
OFFSET	NO



RAW MATERIAL/TRANSPORT AND WAREHOUSING


- **Bucket and lids are made of polypropylene (PP)**
- **Warehousing:** In the case of stacking pallets with filled containers put weight uniformly, using for example proper separators
- **Filling: and closing conditions:** max content temperature during filling 95° C, during stacking content temperature should be lower than 45°C. Put not more than 2 warm containers in the stack.
- When temperature decrease to 25-30° containers are characterized by optimal rigidity and mechanical parameters allowing stacking for maximal static load as below.
- **load on the lower container:**

Static (T<23c°). <55kg


Trasparent container < 44kg

- **Trasportation of filled containers:** containers may be stacked to the 66 % of maximal static load.
- **Palletizing of containers:** product with density 1,6g/cm3 according to the customer practice giving consideration to the mentioned earlier values.
- **All materials and dyes used:** to the produce container or lid designed for the food sector are pproved for food contact
- **This guarantee** is valld 12 months from date of delivery. During this time, the, the package shoulbe used. All packages from singles pallet should be used immediately after un paking.
- **Manufacturer** is not responsible for conatiner deformatrimon because stacking of singles pallets or nputting on them an extra load.

PALLETIZATION FILLED CONTAINERS



TOP VIEW



SIDE VIEW

PALETTIZATION AT DELIVERY

500 unit/pallets
 packaging: hood or bag

BASE COLOURS



