

FULL PACKAGING S.R.L.

TYPE: AROUND BUCKET
 MODEL: P11-1750BIS/2
 LIDS: P-20/Bis/2;
 P-20/Bis/3;

www.full-packaging.it

DIMENSIONS AND WEIGHT

DESCRIPTION	DATA
UPPER DIAMETER (INSIDE)	309,2 mm (b)
UPPER DIAMETER (WITH FLANGE)	326,0n mm (a)
UPPER DIAMETER (WITH HANDLE)	344,5 mm
BOTTOM DIAMETER (EXTERNAL)	286,0 mm(c)
HEIGHTB(WITH STANDARD LID)	274,0 mm (h)
HEIGHT (WITL LID FORVFOILING)	-----
NOMINAL CAPACITY	17.000 ml
TOTAL CAPACITY	18.500 ml
TOTAL USABLEN CAPACITY	17.500 ml
CONTAINER WEIGHT WITH HANDLE	499 g
HANDLE WEIGHT	66,3 g
WEIGHT TOLLERANCE	+/- 5%
DIMENSION TOLLERANCE	+/- 1mm


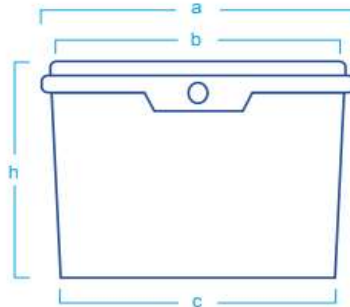


PHOTO OF PRODUCT



DECORATION

DESCRIPTION	OFFSET	IML
WIDGHT (B) :	---	980 mm
HEIGHT (H):	---	277 mm

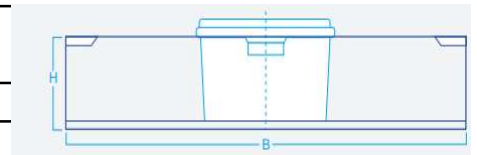

LIDS

DESCRIPTION	DATA
NAME	P-20bis/2
OPTIONAL	NO
WEIGHT	127g
IML	YES
OFFSET	no



DESCRIPTION	DATA
NAME	P-20bis/3
OPTIONAL	NO
WEIGHT	113g
IML	YES
OFFSET	no



RAW MATERIAL/TRANSPORT AND WAREHOUSING


- **Bucket and lids are made of polypropylene (PP)**
 - **Warehousing:** In the case of stacking pallets with filled containers put weight uniformly, using for example proper separators
 - **Filling: and closing conditions:** max content temperature during filling 95° C, during stacking content temperature should be lower than 45°C. Put not more than 2 warm containers in the stack.
- When temperature decrease to 25-30° containers are characterized by optimal rigidity and mechanical parameters allowing stacking for maximal static load as below.
- **load on the lower container:**

Static (T<23c°). <65kg

Trasparent container < 52kg

- **Trasportation of filled containers:** containers may be stacked to the 66 % of maximal static load.
- **Palletizing of containers:** product with density 1,6g/cm3 according to the customer practice giving consideration to the mentioned earlier values.
- **All materials and dyes used:** to the produce container or lid designed for the food sector are pproved for food contact
- **This guarantee** is valod 12 months from date of delivery. During this time, the, the package shoulbe used. All packages from singles pallet shoul be used immediately after un paking.
- **Manufacturer** is not responsible for conatiner deformation because stacking of singles pallets or nputting on them an extra load.

PALLETIZATION FILLIED CONTAINERS



PALLETIZATION AT DELIVERY

240 UNIT/PALLETS
 packaging: hood or bag

256 UNIT/PALLETS
 packaging: hood or bag

280 UNIT/PALLETS
 packaging: hood or bag

BASE COLOURS

